



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

Rec'd PET/PO 10 JUN 2005  
IB 03 / 05 275  
17.11.03  
10/538626

REC'D 02 DEC 2003

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02080309.4

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

Anmeldung Nr:  
Application no.: 02080309.4  
Demande no:

Anmeldetag:  
Date of filing: 16.12.02  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.  
Groenewoudseweg 1  
5621 BA Eindhoven  
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

Method and circuit for operating a storage device

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)  
revendiquée(s)

Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

G11B33/14

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SI SK

Method and circuit for operating a storage device

EPO - DG 1

16. 12. 2002

(94)

The invention relates to a method of operating a storage device sensitive to vibrations in an environment with a source of vibrations.

The invention further relates to a circuit for operating a storage device in an environment with a source of vibrations, the circuit comprising a processor.

5       The invention also relates to a consumer electronics apparatus comprising means for receiving a stream of audio-visual data; a storage device arranged to store the stream of audio-visual data on a disk and a source of vibrations.

Such a method, circuit and apparatus are known from document US-B-  
10   6 067 362. This document discloses an apparatus that reduces the gain of at least certain frequency components of sound produced by a sound system when sound vibrations are expected to hamper the performance parameters of the apparatus. When the level of the output sound or at least of one frequency component of the output sound is too high, the gain of the sound or of that particular frequency component is reduced. The reduction of gain is  
15   aimed at preventing a negative influence of vibrations caused by a high sound level on components of the apparatus like a CD-player or a harddisk.

The disclosed circuit always reduces the gain of the sound produced by the apparatus when it exceeds a certain threshold, irrespective of the activity of e.g. the CD-player or the harddisk.

20

It is an object of the invention to only have the vibrations reduced when those vibrations have a material effect on the performance of the storage device.

This object is achieved using the method according to the invention, which is characterised in that the method comprises the following steps: monitoring the performance  
25   of the storage device; and when the performance of the storage device decreases below a pre-determined level, taking action to reduce the influence of vibrations generated by the source of vibrations.

The performance of the storage device – whether it is a harddisk drive, an optical disk drive or any kind of other storage device – may be measured as the maximum

achievable data retrieval or storage rate or the access time. The pre-determined level may be determined by the requirements of the application retrieving data from or storing data in the storage device.

5 The main advantage of using the method according to the invention is that the influence of the vibrations is only reduced – by e.g. attenuation of sound produced by a sound source – when this is necessary to guarantee a required minimum performance of the storage device. When for example only a bit-rate of 2 Mb per second is required, it is not necessary to take action when the maximum achievable bit-rate of the storage device drops from 35 Mb per second to 5 Mb per second due to vibrations.

10 In other words: using the method according to the invention makes sure that the apparatus applying the method functions according to user preferences as long as possible, i.e. until performance of the apparatus is hampered in a way that a user notices it.

In an embodiment of the method according to the invention, the action comprises the step of providing a message to a user to reduce the vibrations.

15 Automatic adjusting setting of an apparatus, said setting having been set by a user, may be annoying for said user. To prevent annoyance, the user may be provided with a message telling him that he should reduce vibrations, for example reduce the sound level, to ensure proper functioning of the storage device.

20 In an embodiment of the invention, when the performance decreases below the pre-determined level and the environmental temperature of the storage device is above a further pre-determined level, no action is taken.

25 The performance of a storage device and especially the performance of a harddisk drive is influenced by the temperature of the storage device. A hot environment may also cause performance degradation of the storage device, below the pre-determined level at which the method according to the invention takes action. However, reducing vibrations would have little or no effect on the performance of the harddisk drive. Therefore, no action is taken when the performance of the storage device reduces below a pre-determined level and the temperature of the storage device is above a further pre-determined level.

30 In a further embodiment of the invention, the source of vibrations is a loudspeaker and the loudspeaker and the storage device and the loudspeaker are comprised in the same housing and the housing is a consumer electronics apparatus; the storage device is arranged for recording an incoming stream of audio-visual data; the consumer electronics apparatus is arranged for reproducing the incoming stream of audio-visual data by means of a screen and the loudspeaker; and the wherein method comprises the steps of: storing the

incoming stream of audio-visual data on a disk by the storage device and reproducing the stored stream of audio-visual data stored on the disk by means of a screen and the loudspeaker and the action to reduce the influence of vibrations generated by the source of vibrations comprises the step of advising a user to display the incoming stream of audio-visual data instead of the stored stream of audio-visual data.

Timeshifting of video data with a time period of for example 5 minutes or even a couple of hours is known. Most implementations use a harddisk, to which data is written simultaneously with the reading of data that has been stored for the time period mentioned, say 5 minutes. Such an implementation may be built in a stand-alone video recorder, but just as well in a TV-set. Most known TV-sets have just as well built-in speakers. When the sound volume is that high that sound vibrations interfere with the operation of the harddisk, this may affect the time shift operation – reading and writing of data – in such a way that the quality of the reading and writing process is affected, which is disadvantageous to a user.

One solution could be the reduction of gain, but when a user does not accept this option, it might be an option to switch from time-shifted viewing to live viewing. When the time-shift delay is only small, this will not be a big problem for a user and he can fast forward to live reproduction of the TV-programme. At live viewing, the harddisk does not have to be used and when the harddisk is not in operation, operation cannot be hampered by vibrations, which is a clear advantage.

In yet a further embodiment of the invention, the housing is a consumer electronics apparatus arranged for reproduction of audio-visual data; at least one further loudspeaker, not comprised by the consumer electronics apparatus, is connected to the consumer electronics apparatus; and the action comprises the steps of: halting reproduction of the audio-visual data through the loudspeaker comprised by the consumer electronics apparatus; and starting reproduction of the audio-visual data through the further loudspeaker.

Most TV-sets – and other consumer electronics devices – are equipped with connections to connect the TV-set with further speakers or home entertainment systems. This enables a user to connect his TV-set to further and – most often – also better speakers. Usually, such speakers are located away from the TV-set, so vibrations of such speakers are unlikely to influence the performance of the storage device in the TV-set.

Therefore, in case vibrations hampering performance of the storage device, vibrations due to sound reproduction by speakers comprised by the TV-set, user inconvenience is reduced to a minimum when switching sound reproduction to remote

speakers. This minimised user inconvenience is of course a big advantage of this embodiment.

In again a further embodiment of the invention, the source of vibrations is comprised by a first apparatus and the storage device is comprised by a second apparatus; the  
5 first and the second apparatus are connected through a network link; the action is controlling the second apparatus by reducing the power of the vibrations caused by the source of vibrations.

Home networks enable communication between all sort of electronics devices; for example between a home storage server and a large speaker. When these two device are  
10 located not very far away, about a meter, the vibrations of the large speaker while reproducing audio data, may hamper proper operation of the server. To reduce the influence of the vibrations produced by the speaker on the server, the server can control the gain of the speaker and reduce it.

In another embodiment of the invention, the pre-determined level is replaced  
15 by a further lower pre-determined level when the performance of the storage device is below the predetermined level during a pre-determined period.

It may well be that the performance of the storage device is below the threshold at which according to the invention action is taken for a longer period of time. In some cases, this might be the case when a user prefers a high sound level, especially of lower  
20 frequency components, and takes the performance degradation of the storage device and all consequences of that for granted. In this case, action is taken continuously; which may be quite annoying to a user of the consumer electronics apparatus according to the invention.

To prevent this, this embodiment replaces the pre-determined level below which action is taken to reduce the influence of the vibrations by a further lower pre-  
25 determined level when the performance of the storage device is below the pre-determined level during a longer period in time.

The circuit according to the invention is characterised in that the processor is conceived to: monitor the performance of the storage device; and when the performance of the storage device decreases below a pre-determined level, take action to reduce the influence  
30 of vibrations generated by the source of vibrations.

The consumer electronics apparatus according to the invention comprises the circuit according to claim 16 for controlling the storage device.

Embodiments of the invention will now be presented by means of Figures, herein shows:

Figure 1 an embodiment of the consumer electronics apparatus comprising an embodiment of the circuit according to the invention;

5 Figure 2 a TV-set as a further embodiment of the invention;

Figure 3 a TV-set connected to satellite speakers as a further embodiment of the invention;

Figure 4 a network environment as an embodiment of the invention; and

10 Figure 5 a TV-set connected to a subwoofer unit as another embodiment of the invention.

Figure 1 shows an apparatus 100 as an embodiment of the consumer electronics device according to the invention. The apparatus 100 comprises a receiver 102 for receiving a signal 180 from a data source like cable, satellite, roof antenna and the like, an analogue to digital converter (A/D converter) 104, a compression unit 106, a storage device 108, a decompression unit 110, a video processor 112, an audio processor 114, a left speaker 116, a right speaker 118, a display unit 120 and a control unit 150.

20 The receiver 102 is arranged to select and derive a baseband signal from the incoming signal 180. The baseband signal is sent to the A/D converter 104 to convert the baseband signal to a digital stream of audio-visual data. The stream of audio-visual data is transferred to the compression unit 106, which compresses the stream. When the baseband signal is already digital, like with Digital Video Broadcasting (DVB), the A/D converter 104 is obsolete and in some cases, even the compression unit 106 is obsolete, since the incoming signal is already a digital compressed stream of audiovisual data.

25 The compressed stream of audio-visual data is stored in the storage device 108, which in this embodiment is a harddisk drive. The stored stream can be reproduced by the left speaker 116, the right speaker 118 and the display unit 120. The stream can be reproduced directly upon storage, but also a few minutes later or even hours or days later. In this way, the storage device 108 can be used for a time-shift operation, in which a user is enabled to pause the reproduction of a live television programme and continue the reproduction with a delay, by viewing data stored in the storage device 108. During the reproduction, data received is still stored in the storage device 108.

For presentation of the stored stream of audio-visual data, the stream is decompressed by the decompression unit 110. The decompression unit 110 also splits the stream of audio-visual data in an audio part and a video part.

5 The video part is further processed by the video processor 112 and the audio part is further processed by the audio processor 114. The video processor 112 converts the digital video part to an analogue video part and processes the analogue video signal in such a way that it can be presented by the display unit 120. The display unit 120 may be embodied by a cathode ray tube, a liquid crystal display, a plasma display or any other video display means.

10 The audio processor 14 converts the digital audio part to an analogue audio part and process the analogue audio signal in such a way that it can be reproduced by the left speaker 116 and the right speaker 118. Although in this embodiment a stereo audio set-up is presented, it will be apparent to a person skilled in the art that any kind of audio set-up is possible, from mono to any imaginable multi channel sound set-up.

15 In this embodiment, the speakers are comprised by the apparatus 100. This may be a problem for the storage device, as has been acknowledged by the prior art. Vibrations generated by the speakers disturb the functionality of the storage device 108. Examples of this are numerous, especially in case of a disk based memory like a Digital Versatile Disc or a harddisk drive. Vibrations propagating into the actuator or disk assembly  
20 are viewed as external disturbances to the position control of, which makes it more difficult for the pick-up unit to follow a track on the disk.

Besides that, the vibrations affect the pick up unit itself. Vibration cause bad reading of data leading to degradation of the performance of the memory and in the worst case, even crash of the pick up unit in the disk, which is disastrous for the lifetime and  
25 performance aspects of the storage device. Often such effects are obscured for a while to the integral apparatus 100 by error handling procedures in the apparatus 100. Only a performance monitoring tool may detect the onset of these changes.

Prior art systems try to kill the vibrations but do it in a rigid way, even when  
30 this is not necessary. For example, when the storage device is not in use and the pick up unit is in a safe position, vibrations cannot degrade the performance of the storage device. Therefore, the vibrations do not have to be killed. Furthermore, when only little performance is needed, say 20% of the nominal performance, and vibrations bring down performance to a level of 50% of the nominal performance, the vibrations do not have to be killed either.



This is an important basic principle. Especially when the vibrations are caused by a sound source, it is not desirable to unnecessarily modify the sound volume since this is annoying for a user. Using the method according to the invention, only action is taken to reduce the vibrations when the vibrations cause unacceptable degradation of the performance of the storage device; when the performance drops below a pre-determined level. Of course, the setting of the pre-determined level may depend on the application that uses the storage device.

The performance may be measured in various ways. In the embodiment of the invention described by means of Figure 1, the control unit 150 keeps statistics on the access time of the storage device 108. When the average access time is too long for a certain amount of time, say over 500 milliseconds for a period of 10 seconds, action is taken. Of course, various related embodiments are obvious for the man skilled in the art, which are to take action when the median access time is too high, the maximum access time is too high or the standard deviation of the access time is too high.

In a further embodiment of the invention, action is taken when the average bit-rate of data flowing from the storage device 108 to the decompression unit 110 drops below a pre-determined level. Again, various variations are obvious to a person skilled in the art.

As mentioned in a previous paragraph, the pre-determined level may depend on the application that uses the storage device. When the application is the reproduction of a stream of audio-visual data that is stored on the storage device, this application may require a certain bit-rate for proper operation, say 4 Megabit per second. When the storage device is used by this application only, the performance of the storage device may be determined by the bit-rate and the pre-determined limit is 4 Megabit per second, preferably with a safety margin of 10%.

Actions that can be taken to reduce the level of the vibrations are numerous and depend on the set-up of an apparatus using the method according to the invention or an embodiment thereof. Embodiments described here are mainly related to audio vibrations. However, the invention may be used as well to reduce the influence of other vibrations on a storage system.

First, the apparatus can take action itself to kill the vibrations. Various embodiments of the method according to the invention doing this will be discussed hereafter. In another embodiment of the method according to the invention, the apparatus takes action to reduce the influence of the vibrations by providing a message to a user of the apparatus. The message advises a user to reduce vibrations. When this embodiment of the method according

to the invention is for example used in a digital television set where the vibrations are most likely to be caused by sound produced by built-in speakers, a user may be supplied with an on-screen message to turn down the volume produced by the television set.

In a further embodiment, when a television set equipped with a recording  
5 device records a television programme for time shift purposes, a user is advised to watch the recorded programme in a live mode, rather than with a delay. In this way, the programme does not have to be recorded and the recording process is not influenced by any vibrations, since there is no recording process.

In yet a further embodiment of the invention, general 'household' activities of  
10 the harddisk, like background defragmentation, are halted when the performance of the harddisk drive degrades because of e.g. vibrations. In this way, the normal recording and/or playback process can be continued without problems. The 'household' activities are continued when the performance of the harddisk drive is up again.

As mentioned previously, the apparatus can take also action itself to reduce the  
15 influence of vibrations. In one embodiment according to the invention, the amount of vibrations is reduced. When this embodiment of the method according to the invention is used in a TV-set 200 (Figure 2) comprising speakers 210 (Figure 2) which produce vibrations (sound) disturbing the performance of a storage device built-in in the TV-set, the volume of the sound produced by the speakers is reduced. In yet another embodiment, only the levels of  
20 certain parts of the frequency spectrum causing vibrations are killed. Examples for this may be found in US-B-6 067 362.

However, it might be possible that a user prefers a loud sound to go with a  
programme presented by a TV-set and still wants to record a programme. In this case, the problem may be solved by shutting down speakers comprised by the TV-set and provide  
25 sound via other speakers. This is depicted in Figure 3, which shows a TV-set 300 with a built-in left speaker 310, a built-in right speaker 320 and connected to a left satellite speaker 330, a right satellite speaker 340 and a back satellite speaker 350. The TV-set 300 comprises a storage device (not shown).

When the performance of the storage device drops below a level which is not  
30 acceptable for the task it is performing at that time, the sound of the built-in left speaker 310 and the built-in right speaker 320 is cut off and re-directed to the left satellite speaker 330, the right satellite speaker 340, respectively and – optionally – the back satellite speaker 350.

It may be that the remote speakers are already switched on when sound to the built-in speakers is switched off. In one embodiment of the method according to the

invention, no sound is redirected from the built-in speakers to the remote speakers. In a further embodiment, the sound of the built-in speakers is re-directed and added to the sound already produced by the remote speakers.

5 When the satellite speakers are located far away enough, the sound vibrations they produce will not influence the storage device built-in in the TV-set 300 anymore. When the sound level produced by the TV-set is reduced to a level at which no degradation of the performance of the storage device was detected, the built-in left speaker 310 and the built-in right speaker 320 may be switched on again.

10 Alternatively, this is done when the performance of the storage device increase to a level above a further pre-determined limit, that may be equal to the pre-determined level at which the , the sound of the built-in left speaker 310 and the built-in right speaker 320 is cut off.

Another embodiment of the method according to the invention will be described by means of Figure 4, which shows a network environment 400, comprising a  
15 server 410, a TV-set 420, a first speaker 430 located close to the TV-set 420 comprising a storage device (not shown), a second speaker 440 located away from the TV-set 420 and a wired or wireless network 450 connecting all devices. The devices may communicated over the network directly to each other or via the server 410, by any kind of protocol from Aloha to USB and TCP/IP and many more without departing from the scope of the invention.

20 In normal operation of the TV-set 420 when reproducing audio-visual data stored on the storage device, audio data is reproduced by the first speaker 430. When the performance of the storage device drops below a pre-determined level, this is signalled to the server 410, which will lower the sound produced by the first speaker 430.

The reduction of the sound volume may be compensated by reproducing the  
25 audio-data by the second speaker 440 as well. Since the second speaker 440 is located away from the TV-set, influence of the sound vibrations produced by the second speaker 440 on the performance of the storage device will be much less. In a further embodiment of the invention, the storage device is located in the server 410, which may be located in the vicinity of a speaker or other source of vibrations as well.

30 Vibrations may be airborne like sound waves travelling through the air, but also travelling in structures, travelling from one structure to an adjacent structure. Figure 5 shows a TV-set 500 comprising a storage device (not shown), with a sub-woofer unit 520 connected thereto. The sub-woofer unit 520 is a speaker designed to augment low frequency components of an audio signal, preferably generated by the TV-set 500.

While producing low-frequency audio signals, not only the speaker membrane (not shown) of the sub-woofer unit 520 will vibrate, but also the full outer structure of the sub-woofer unit 520. These vibrations will be transferred to the TV-set 500, influencing the performance of the storage device. According to a preferred embodiment, when the level of vibrations is too high so normal operation of the storage device is not possible, the sub-woofer is turned off by a controller (not shown) in the TV-set 500. In a further embodiment of the invention, the sound produced by the subwoofer is attenuated when vibrations hamper proper performance of the storage device.

Airborne or structureborne vibrations may also be amplified by the environment in which the TV-set 500 is placed. The method according to the invention will in that case take action at a lower sound volume.

Figure 6 shows a consumer electronics recording device 600 for recording audio-visual data. The recording device 600 comprises an optical disk drive 610 for reading data from and writing audio-visual data to an optical disk 620 and further comprises a harddisk drive 630 for storage and retrieval of audio-visual data.

When reading or writing data at high speeds – higher than real-time –, the optical disk 620 is rotated at high speeds, generating aerodynamic noise. This is very wide spectrum noise having a significant energy level, causing the structure of the recording device 600 to vibrate. Since the harddisk drive 630 is built in in the structure of the recording device 600, vibration will be transferred to the harddisk drive 630, hampering the performance of the harddisk drive 630.

The influence of the vibration in the structure on the harddisk drive 630 may be reduced by various means of suspension, but since consumer electronics devices have to be not too large and not too heavy, this is not always a proper solution. Furthermore, suspension does not solve the problem of airborne vibrations caused by the optical disk drive 610 and isolation to solve this problem consumes valuable space and creates cooling problems.

According to an embodiment of the method according to the invention, the recording device takes action to reduce the influence of the vibrations caused by the optical disk drive 610 on the performance of the harddisk drive 630. In one embodiment, the rotation speed of the optical disk 630 is reduced. In a further embodiment, a user is warned that the high rotation speed of the optical disk is hampering the performance of the harddisk drive 630 and the user is either advised to reduce the rotational speed of the optical disk or cancel activities that involve action of the harddisk drive 630.

It may well be that the performance of the storage device is below the threshold at which according to the invention action is taken for a longer period of time. For certain embodiments, this might be the case when a user prefers a high sound level, especially of lower frequency components, and takes the performance degradation of the storage device and all consequences of that for granted. In this case, action is taken continuously; which may be quite annoying to a user of the consumer electronics apparatus according to the invention.

To prevent this, an embodiment of the method according to the invention replaces the pre-determined level below which action is taken to reduce the influence of the vibrations by a further lower pre-determined level when the performance of the storage device is below the pre-determined level during a longer period in time.

Also, the performance of a storage device and especially the performance of a harddisk drive is influenced by the temperature of the storage device. A hot environment may also cause performance degradation below the pre-determined level at which the method according to the invention takes action. However, reducing vibrations would have little or no effect on the performance of the harddisk drive. Therefore, according to an embodiment of the invention, no action is taken when the performance of the storage device reduces below a pre-determined level and the temperature of the storage device is above a further pre-determined level.

To this, the storage device may be equipped with a temperature sensor. Some harddisk drives are already equipped with a temperature sensor; this sensor may be used when employing this embodiment of the method according to the invention.

From the description of the preferred embodiment, it will be apparent to any person skilled in the art that the source of vibrations is not limited to sound sources or spinning disks, but extends beyond that. The invention may also be employed in cars, which are known to be an environment with lots of vibrations.

It will also be apparent that the storage device is not limited to a harddisk drive or an optical disk drive, but may be used in any environment using a storage device susceptible to vibrations.

Furthermore, it will be understood as well that the action taken by the method according to the invention when the performance of the storage device drops below a pre-determined level may be embodied in numerous ways; direct as well as via a user of a device employing the method according to the invention.

The invention may be summarised as follows:

Memory systems like disk drives are usually sensitive to vibrations. In a consumer electronics environment, with reproduction of audio, this is a problem since audio reproduction means generating vibrations. To prevent performance degradation of the memory system, action is taken to reduce influence of vibrations on the memory system. This is only done when the performance of the storage system drops below a pre-determined level that it causes such degradation of performance that it is annoying for a user. Of course, the pre-determined level is – among others – influenced by the application that uses the memory system. Actions to take may be reducing the sound level, but also advising a user to reduce the sound level or cancel operations that use the storage system.

## CLAIMS:

16. 12. 2002

(94)

1. Method of operating a storage device sensitive to vibrations in an environment with a source of vibrations, characterised in that the method comprises the following steps:
  - (a) Monitoring the performance of the storage device
  - (b) When the performance of the storage device decreases below a pre-determined level,  
5 taking action to reduce the influence of vibrations generated by the source of vibrations.
2. Method according to claim 1, wherein the performance of the storage device is indicated by service time statistics of the storage device.
- 10 3. Method according to claim 1, wherein the performance of the storage device is indicated by the average bit-rate of the storage device.
4. Method according to claim 1, wherein the action comprises the step of providing a message to a user to reduce the vibrations.  
15
5. Method according to claim 1, wherein the source of vibrations is at least one loudspeaker and the loudspeaker and the storage device and the loudspeaker are comprised in the same housing.
- 20 6. Method according to claim 1, wherein the source of vibrations is a loudspeaker and the action is reduction of the volume of the sound produced by the loudspeaker.
7. Method according to claim 1, wherein when the performance decreases below the pre-determined level and the environmental temperature of the storage device is above a  
25 further pre-determined level, no action is taken.
8. Method according to claim 5, wherein
  - (a) the housing is a consumer electronics apparatus;
  - (b) the storage device is arranged for recording an incoming stream of audio-visual data;

(c) the consumer electronics apparatus is arranged for reproducing the incoming stream of audio-visual data by means of a screen and the loudspeaker; and

the wherein method comprises the steps of:

(d) storing the incoming stream of audio-visual data on a disk by the storage device; and

5 (e) reproducing the stored stream of audio-visual data stored on the disk by means of a screen and the loudspeaker.

9. Method according to claim 8, wherein the action to reduce the influence of vibrations generated by the source of vibrations comprises the step of advising a user to  
10 display the incoming stream of audio-visual data instead of the stored stream of audio-visual data.

10. Method according to claim 5, wherein

(a) the housing is a consumer electronics apparatus arranged for reproduction of audio-visual  
15 data;

(b) at least one further loudspeaker, not comprised by the consumer electronics apparatus, is connected to the consumer electronics apparatus; and

(c) the action comprises the steps of:

i.) Halting reproduction of the audio-visual data through the loudspeaker comprised  
20 by the consumer electronics apparatus; and

ii.) Starting reproduction of the audio-visual data through the further loudspeaker.

11. Method according to claim 1, wherein the source of vibrations is comprised by a first apparatus and the storage device is comprised by a second apparatus; the first and the  
25 second apparatus are connected through a network link; the action is controlling the second apparatus by reducing the power of the vibrations caused by the source of vibrations.

12. Method according to claim 1, wherein the pre-determined level is replaced by a further lower pre-determined level when the performance of the storage device is below the  
30 predetermined level during a pre-determined period.

13. Method according to claim 1, wherein the vibrations are vibrations in a structure comprising the storage device.



14. Method according to claim 1, wherein the vibrations are airborne vibrations.
15. Method according to claim 1, wherein the storage device is a disk drive.
- 5 16. Method according to claim 1, wherein the action is halting activities related to the storage device other than storage and retrieval of audio-visual data.
17. Circuit for operating a storage device in an environment with a source of vibrations, the circuit comprising a processor, characterised in that the processor is conceived
- 10 to:
- (a) Monitor the performance of the storage device; and
  - (b) When the performance of the storage device decreases below a pre-determined level, take action to reduce the influence of vibrations generated by the source of vibrations.
- 15 18. Consumer electronics apparatus comprising:
- (a) Means for receiving a stream of audio-visual data;
  - (b) A storage device arranged to store the stream of audio-visual data on a disk;
  - (c) A source of vibrations;
  - (d) The circuit according to claim 17 for controlling the storage device.
- 20 19. Consumer electronics apparatus according to claim 18, wherein the source of vibrations is a disk drive arranged to spin a disk in operation.
20. Consumer electronics apparatus according to claim 17, wherein the source of
- 25 vibrations is a speaker.

## Abstract

Memory systems like disk drives are usually sensitive to vibrations. In a consumer electronics environment, with reproduction of audio, this is a problem since audio reproduction means generating vibrations. To prevent performance degradation of the memory system, action is taken to reduce influence of vibrations on the memory system. This is only done when the performance of the storage system drops below a pre-determined level that it causes such degradation of performance that it is annoying for a user. Of course, the pre-determined level is – among others – influenced by the application that uses the memory system. Actions to take may be reducing the sound level, but also advising a user to reduce the sound level or cancel operations that use the storage system.

Fig. 1

EPO - DG 1

16. 12. 2002

94

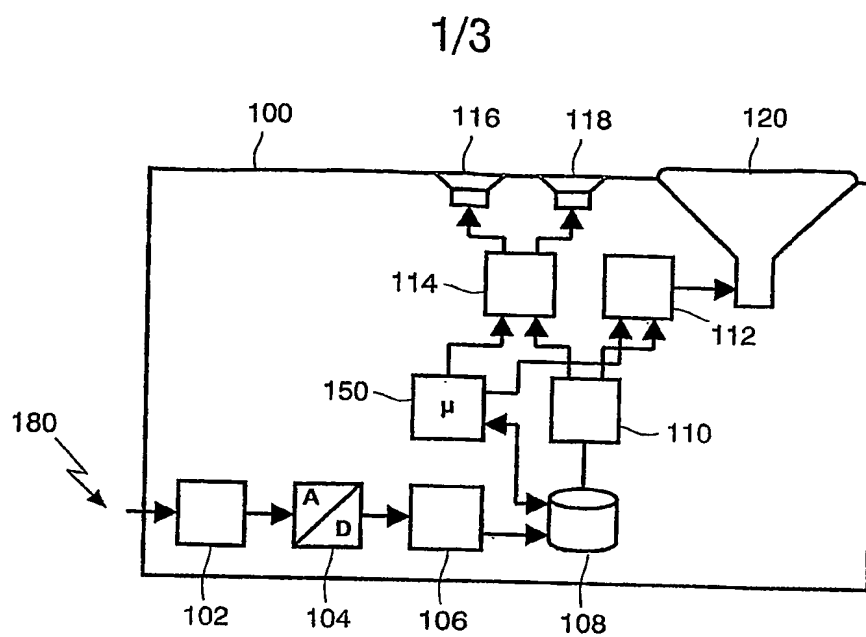


FIG. 1

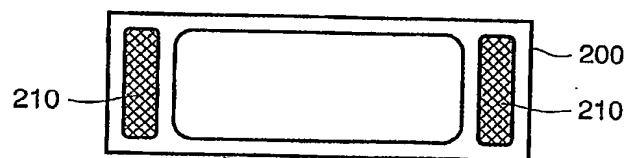


FIG. 2

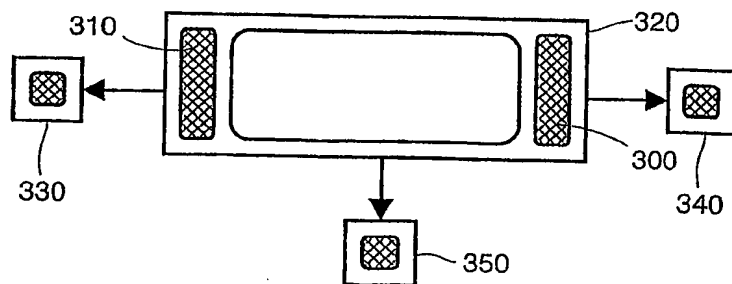


FIG. 3

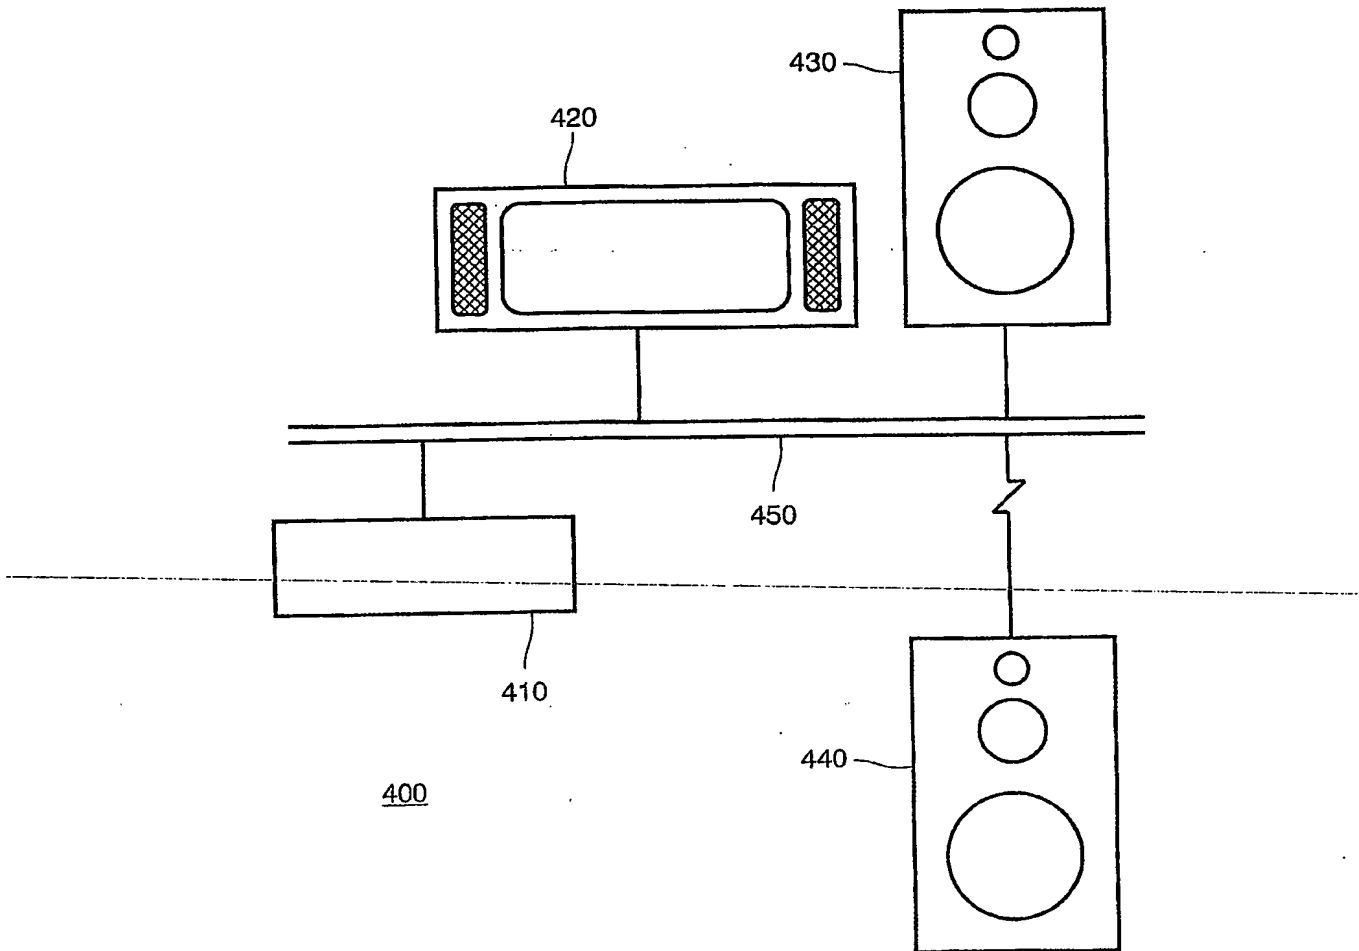


FIG.4

3/3

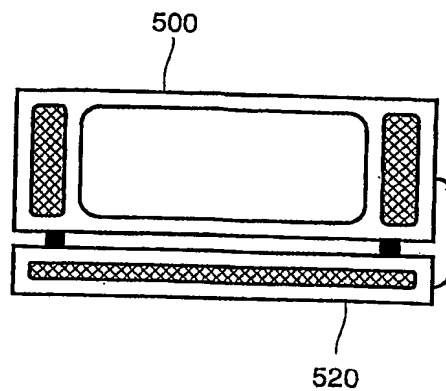


FIG. 5

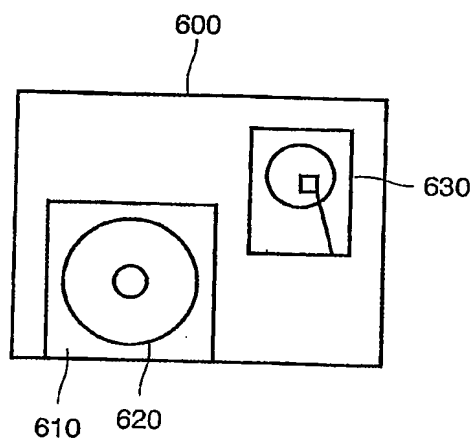


FIG. 6